
ETHOS







BEIGE

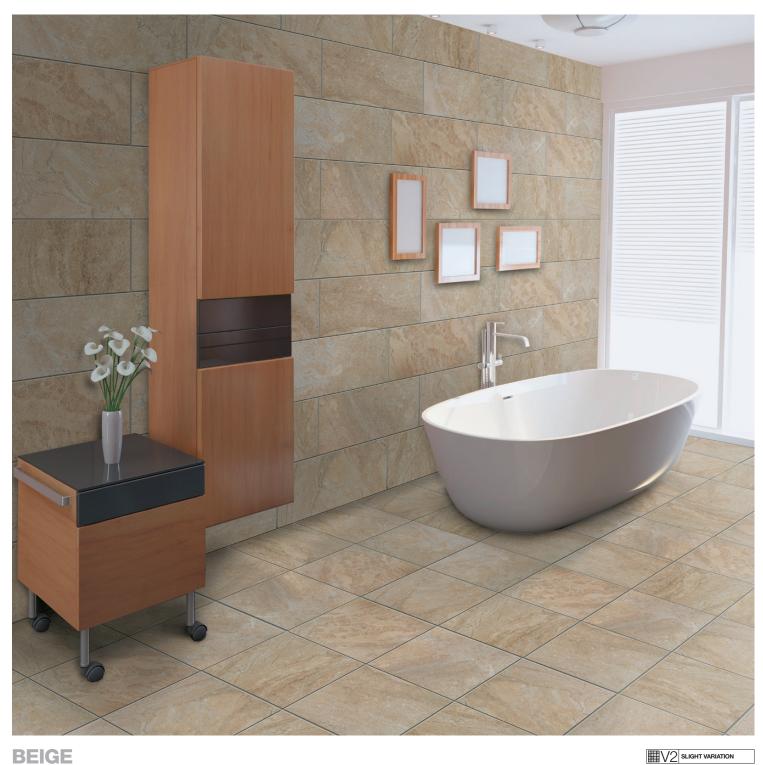















1094783 - 12"x24"◆

1094699 - 12"x12"

1094715 2"x2" Mosaic (12"x12")

1094719 2"x2" Hexagon Mosaic (12"x12")



GREY















1094701 - 12"x12"

1094717 2"x2" Mosaic (12"x12")

1094721 2"x2" Hexagon Mosaic (12"x12")



NOCE



1094712 6"x6"



1094784 - 12"x24"**◆**

1094700 - 12"x12"



1094716 2"x2" Mosaic (12"x12")



1094708 3"x12" Bullnose

1094720 2"x2" Hexagon Mosaic (12"x12")

COLOR SPECIFICATIONS AND SIZES AVAILABLE

BEIGE	NOCE	GREY	
1094703	1094704	1094705	
1094783	1094784	1094785	
1094699	1094700	1094701	
1094711	1094712	1094713	
1094715	1094716	1094717	
1094719	1094720	1094721	
1094707	1094708	1094709	
	1094703 1094783 1094699 1094711 1094715 1094719	1094703 1094704 1094783 1094784 1094699 1094700 1094711 1094712 1094715 1094716 1094719 1094720	

NOMINAL SIZE	METRIC (CM)	THICKNESS (MM)	PIECES PER BOX	SQ. FT PER BOX	WEIGHT PER BOX	BOXES PER PALLET	WEIGHT PER PALLET
18"x18"	45x45	9 mm	7	15.75	64.5	32	2066
12"x24"	30x60	9 mm	7	14	57.4	48	2755
12"x12"	30x30	9 mm	14	14	57.4	48	2755
6"x6"	15x15	9 mm	34	8.5	35	72	2520
2"x2" Mosaic (12"x12")	30x30	9 mm	10	10	41	45	1900
2"x2" Hex Mosaic (12"x12")	30x30	9 mm	10	10	41	45	1900
3"x12" Bullnose	7.5x30	9 mm	12	3	12.0	168	2071

ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.
PLEASE CONTACT FLORIM CUSTOMER SERVICE AT 877-FLORIM1 FOR PACKAGING INFORMATION.

♦ MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16" IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

HADE VARIATION











While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.



SUBSTANTIAL VARIATION

Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.

TECHNICAL SPECIFICATIONS Surface Abrasion PEI IV **ASTM C1027** Water Absorption ≤ 0.5% ASTM C373 Chemical Resistance CLASS A **ASTM 650** ASTM C1028 (Drv) ≥ 0.80 • Coefficient of Friction ≥ 0.60 • ASTM C1028 (Wet) ≥ 0.42 • ANSI 137.1 (Dvnamic) Stain Resistance CLASS A ASTM C1378 ≥ 400 (9mm) **Breaking Strength** ASTM C648 Resistance to Freeze RESISTANT ASTM C1026 Scratch Hardness ≥7 MOHS

ALL FLORIM USA PRODUCTS MEET OR EXCEED ALL STANDARDS IN ANSI A137.1.

• DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICIENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

WHY PORCELAIN?

There are many reasons to choose impervious porcelain tile over other floor coverings. It offers the largest array of design options and holds its value the longest. In a comparison between the many different flooring options, porcelain tile offers one of the most durable and least expensive options over the lifespan of the building.

Benefits of Porcelain Tile

- Impervious to water
- Easy to maintain
- Variety of design options Environmentally friendly
- Resistant to germs and bacteria
 Fade resistant
- Fire resistant
- Durable best long-term value vs. other floor coverings

HOW TO MAINTAIN YOUR PORCELAIN TILE

- Sweep or vacuum regularly.Wash with a household cleaner and hot water then rinse with clean water (do not use wax, oil-based, or abrasive cleaners).

Scan this barcode for more care, maintenance, and installation tips at www.florimusa.com



Colors Shown in this brochure may vary from actual product.

Final selection should be made from actual product samples.

















PROGRESS THAT TOUCHES AND INVESTS IN THE ENTIRE SOCIETY

As a active member of the U.S Green Building Council, Florim spreads awareness to the entire American communities and encourages towards the use of building solutions inspired by environmentally friendly practices. Using Florim products for project implementation, will positively contribute in obtaining scores and points required for earning the LEED certification (Leadership in Energy and Environmental Design).

A COMMITMENT TO THE DEVELOPMENT OF PRODUCTS FOR A CONSCIOUS BUILDING TRADE
Florim offers products containing recycled material. The adoption of eco-compatible production systems is merit of Italian designs produced in the U.S.

Florim commits to the eco-compatible project and translates the same into an avant-quard production process, minimizing the negative impact on the environment.







PROGRESS THAT TOUCHES AND INVESTS IN THE ENTIRE SOCIETY

As a active member of the U.S Green Building Council, Florim spreads awareness to the entire American communities and encourages towards the use of building solutions inspired by environmentally friendly practices.

Using Florim products for project implementation, will positively contribute in obtaining scores and points required for earning the LEED certification (Leadership in Energy and Environmental Design).

TECHNICAL DEVELOPMENT THAT CONSIDERS THE NATURAL ENVIRONMENT
Florim commits to the eco-compatible project and translates the same into an avant-guard production process, minimizing the negative impact on the environment.



