Bishop Lifting Products, Inc.
www.Lifting.com

Lifting Devices Catalog

Spreader Bars • Lifting Beams • Special Lifters • Material Baskets • Personnel Baskets

Cranes • Rigging Components • Storage

AWRF · AESC · ABC MEMBER · IADC · MEMBER S&RA · WEB SLING & TIE DOWN ASSOCIATION MEMBER · QUALITY SYSTEM CERTIFICATION ISO 9001:2008 DNV

Personnel Baskets

4-point Suspension

Single-Point Suspension

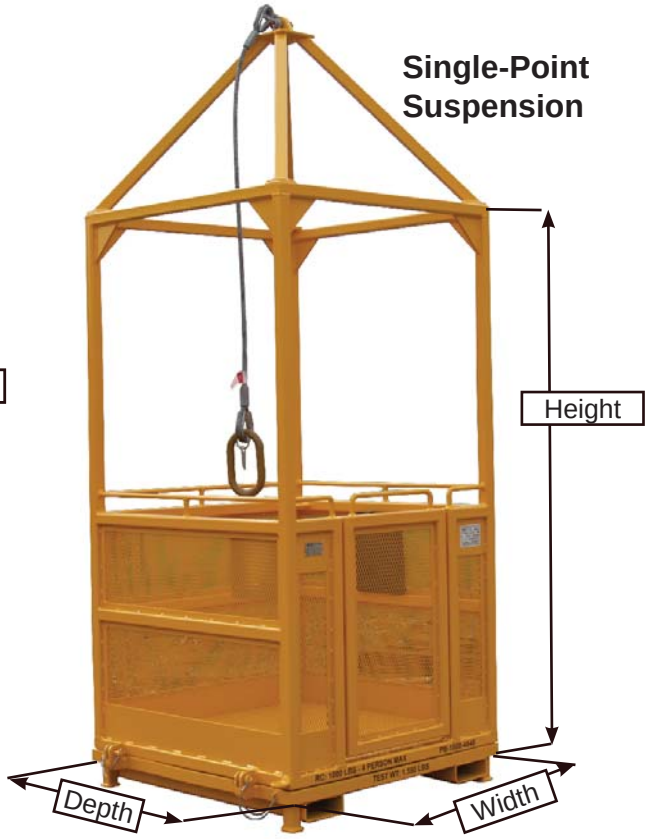

Model: PB - Liftmax® Personnel Basket
PBS - Liftmax® Personnel Basket, single point suspension

Features:

- Used for lifting personnel to perform work or for transporting personnel
- Expanded metal sides, toe plate, hand rail, lanyard pad eyes, solid non-slip floor
- Inward opening, self locking gate
- Detachable test weight included with forklift pockets
- Optional stinger, single-point attachment available
- Stainless Steel data plate with individual serial numbers with RFID tracking
- Painted Yellow with durable enamel paint
- Meets or exceeds ASME B30.23 “Personnel Lifting Systems”
- Proof Tested to 125%

Capacity (lbs.)	Model Number	Working Personnel Capacity	Maximum Personnel Capacity	Length	Depth	Height	Test Weight (lbs.)
600	PB-00030-030308	1	2	3’	3’	8’	750
1000	PB-00050-040408	2	3	4’	4’	8’	1,250
1500	PB-00075-060408	3	5	6’	4’	8’	1,875
2000	PB-00100-080408	4	6	8’	4’	8’	2,500

Stinger & single-point suspension will add additional weight.

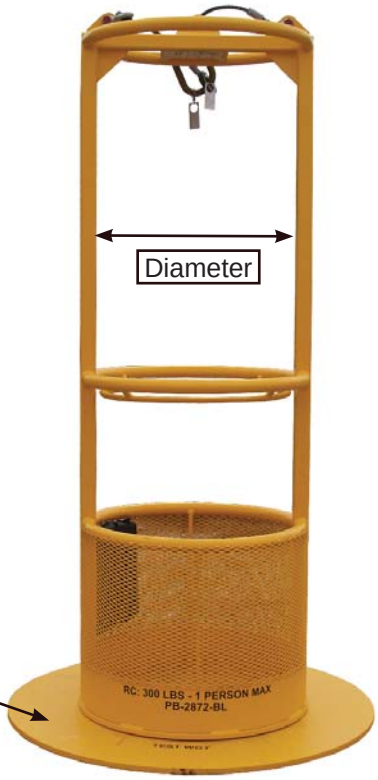

Test weight pictured

Model: PBR - Liftmax® Personnel Basket, Round

Features:

- Used for lifting personnel to perform work or for transporting personnel
- Expanded metal sides, toe plate, hand rail, lanyard pad eyes, solid non-slip floor
- Detachable test weight included
- Stainless Steel data plate with individual serial numbers with RFID tracking
- Painted Yellow with durable enamel paint
- Meets or exceeds ASME B30.23 “Personnel Lifting Systems”
- Proof Tested to 125%

Capacity (lbs.)	Model Number	Working Personnel Capacity	Transport Personnel Capacity	Inside Diameter	Outside Diameter	Height (Feet)	Dry Weight Approx. (Lbs.)	Test Weight (lbs.)
300	PBR-00015-20	1	1	24”	30”	8’	336	375
300	PBR-00015-36	1	1	30”	36”	8’	375	375
600	PBR-00030-48	2	2	42”	48”	8’	475	750
1000	PBR-00050-54	2	3	48”	54”	8’	660	1260

Model: PBE - Liftmax® Personnel Basket, EVAC

Features:

- Used primarily in EVAC situations
- Inward opening gate one end, counter weighted vertical opening gate opposite end
- Vertical gate enables a stretcher or gurney to be loaded easily
- Expanded metal sides, toe plate, hand rail, lanyard pad eyes, solid non-slip floor
- Detachable test weight included
- Stainless Steel data plate with individual serial numbers with RFID tracking
- Painted Yellow with durable enamel paint
- Meets or exceeds ASME B30.23 “Personnel Lifting Systems”
- Proof Tested to 125%

Capacity (lbs.)	Model Number	Working Personnel Capacity	Transport Personnel Capacity	Length	Depth	Height	Weight Approx. (Lbs.)
1000	PBE-00050-080508	2	3	8’	56”	8’	2,300

Model: WP - Liftmax® Personnel Work Platform

Features:

- Used for lifting personnel with a forklift to perform work
- Inward opening self locking gate
- Expanded metal sides, toe plate, hand rail, lanyard pad eyes, solid non-slip floor
- Stainless Steel data plate with individual serial numbers with RFID tracking
- Painted Yellow with durable enamel paint
- Meets or exceeds ASME B30.23 “Personnel Lifting Systems”
- Proof Tested to 125%

Capacity (lbs.)	Model Number	Working Personnel Capacity	Maximum Personnel Capacity	Length	Depth	Height
600	WP-00030-030308	1	2	3’	3’	4’
1000	WP-00050-040408	2	3	4’	4’	4’
1500	WP-00075-060408	3	5	6’	4’	4’
2000	WP-00100-080408	4	6	8’	4’	4’